Protector de columna grande

Axelent ofrece una protección de columna más grande para ofrecer la protección más flexible para columnas más grandes. Esta protección es adecuada para columnas cuadradas de 400 mm como estándar. También hay rellenos disponibles para ampliar la protección hasta 1000 mm cuadrados. La protección de la columna está fabricada en polietileno de baja densidad para otorgarle alta flexibilidad y resistencia.

Modelos

ARTÍCULOS / DESCRIPCIÓN		ANCHURA (MM)	ALTURA (MM)
	AG-CP400 RAL 1003	200	1080
	AG-CP4-250IN Infill, RAL 1003	250	
	AG-CP4-110IN Infill, RAL 1003	110	

Impact Protection

X-Protect is Safe

- Our impact protection products undergo rigorous testing at our state-of-the-art testing facility.
- With decades of experience in industrial safety, we've designed our impact protection to perform effectively in real-world conditions.
- We know safety and can guide you to the best solutions tailored to your specific needs.

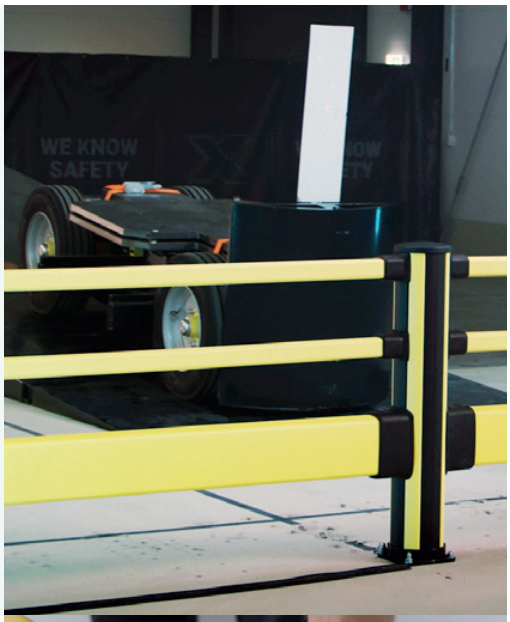

X-Protect is Modular

- Quickly modify barrier specifications with minimal waste.
- Perform easy and cost-effective repairs at a component level.
- Quickly build strong integrated installations with few parts.

X-Protect is Sustainable

- Simple end of life dis-assembly, even after an accident.
- Single material components that are easy to recycle.
- Repairable by design, damaged or worn components are easily replaced extending the barrier's life.

Technical Information

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails

Width x Height:
68 × 72 mm | 2 11/16" × 2 27/32"
Length:
270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers

Width x Height:
116 × 220 mm | 4 9/16" x 8 21/32"
Length:
270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS

Height:
350 - 1160 mm
13 13/16" – 45 11/16"
Width:
200 mm
7 7/8" in

Component Colours

RAL 1018

RAL 9011

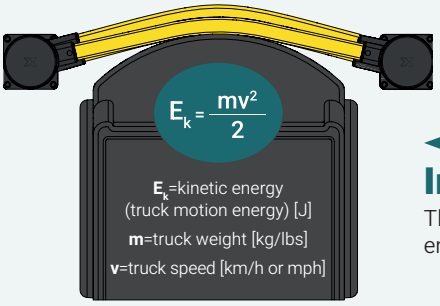

Impact testing

This is how we calculate the energy from a vehicle impact.

Loaded weight
3600 kg / 7930 lbs

Speed	Load
6 km/h | 3.7 mph	5020 J
8 km/h | 5 mph	8880 J
12 km/h | 7.5 mph	19960 J

Loaded weight
2700 kg / 5940 lbs

Speed	Load
6 km/h | 3.7 mph	3770 J
8 km/h | 5 mph	6660 J
12 km/h | 7.5 mph	14970 J

Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h | 3.7 mph	2930 J
8 km/h | 5 mph	5180 J
12 km/h | 7.5 mph	11670 J

Operating temperature



-10°C → 40°C

Assembly

SCAN THE CODE TO DOWNLOAD OUR ASSEMBLY MANUALS

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*



1 5250 J

2 4500 J

3 6200 J

4 7700 J



5 7000 J



6 5000 J

7 6700 J



8 8000 J



9 8300 J

10 0 J

11 1800 J

12 3000 J

The Floor Barrier can be used in combination with configurations: **3, 6, 8 & 9**

1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian +Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier

* The highest force depends on the C-C. More information is available upon request.